


# HILLENG



INTERNATIONAL

## SPRAY GLUE SYSTEM FOR LAMINATING LINES

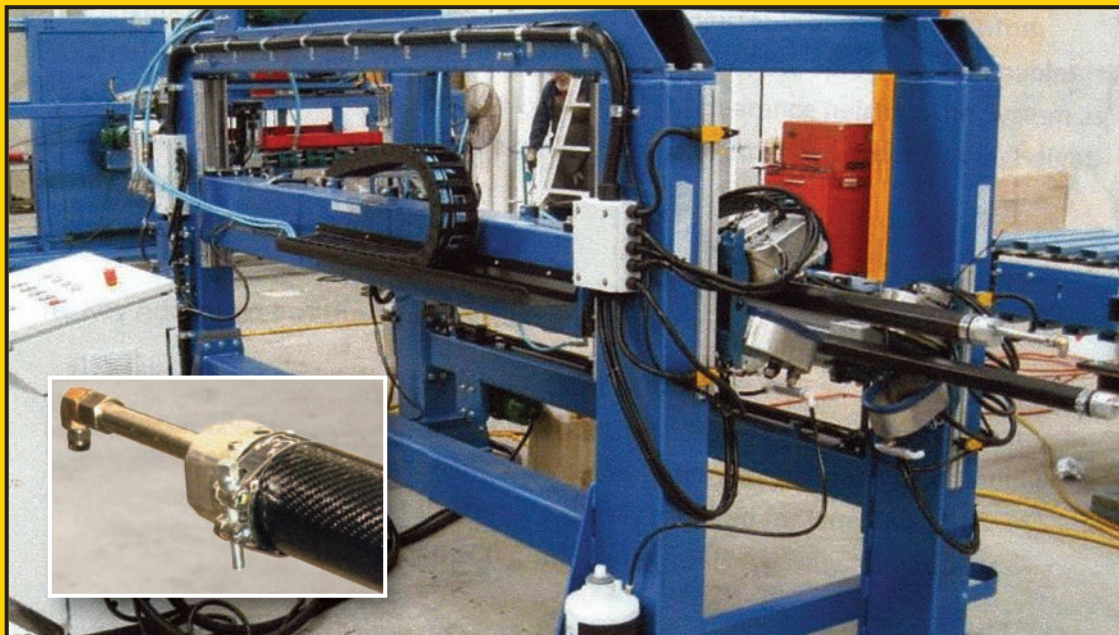

Our new Low-Pressure, Self-Cleaning Spray Glue System can be tailored to most Laminated Sandwich Panel Lines – regardless of manufacturer. Unique design delivers a precise component mix of 2 Part Polyurethane Adhesive in a variable volume range from 240 grams/minute to 1,540 grams/minute. Spray heads are operator adjustable and can be customized for panel line fit and tight clearances.

### KEY ADVANTAGES OF THE PATENT-PENDING HILLENG SPRAY GLUE SYSTEM...

- Maintains set adhesive volume and auto adjusts for line speed.
- Eliminates guesswork and applies correct volume of adhesive for huge cost savings.
- Self-purging, permanently primed, and ready to start from line control console.
- Low-pressure operation prevents visible misting and resulting line contamination.
- Static mixer accurately mixes adhesive components.
- Superior lamination from precisely measured and evenly applied adhesive.

Consult your Hilleng representative for the Spray Glue System configuration suited to the make and model of your panel lamination line.

**BRADBURY GROUP**  
*Australia*



### Hilleng International

#### **Bradbury Group Australia Pty Ltd**

25 Eurora Street  
Kingston, QLD 4114  
AUSTRALIA

Tel: +61 7 3299 3111

Fax: +61 7 3299 5511

mail@hilleng.com.au

[www.hilleng.com.au](http://www.hilleng.com.au)

©2010J BRAD-2461

# HILLENG